

ADHESIVE SPRAY 92012

SUITABLE FOR:

- HVAC Insulation
- Automotive Headliners
- Packaging / Shipping / Labeling / Carton Sealing
- Asbestos Abatement
- Cabinetry / Carpeting
- Adhering Decorative Laminate to Particleboard and MDF (Medium Density Fiberboard), Substrates, Metals and Plywood.



ADHESIVE

SPRA

2012

Recommended for decorative laminate to particleboard and MDF (mediumdensity fiberboard) substrates, metals and plywood. A webbing type spray pattern that is water white and does not contain Methylene Chloride. Its unique formula prevents soak-in of the adhesive on porous surfaces. It offers the user very high coverage with a fast tack time for general purpose bonding of a wide variety of substrates, such as cardboard, foam rubber, insulation material, rubber, urethane foam, laminates and more.




- High Solids High Strength
- Fast Tack Waterproof
- Provides both Temporary and Permanent Bonds



^Hgh Strength ^{Fast} Tack

High Temperature

DANGER: EXTREMELY FLAMMABLE BOR HARMFUL HARMFUL OF FALL BURLOWED, MAY CAUSE SKIN, EVEND SHATORY IRRITATION REPORTIONS ON BACK FAMEL WITH 10 62 (HSI Danut

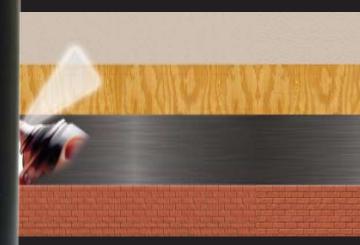

VOC INFORMATION: California ARB Consumer Products Category: Web Spray Adhesive. VOC Standard = 55.0%. This product complies with current applicable CARB standard.



TERAND INDUSTRIES, INC.



P.O. Box 667770 • Pompano Beach, FL 33066-7770 www.terandstore.com